

Lightweight Double Jacket Attack Hose

Backed by a 10 Year Warranty

- ▶ 100% synthetic all polyester double jacket
- ▶ 100% mildew resistant
- ▶ Thin wall high tensile EPDM rubber liner
- ▶ UL listed
- ▶ Couplings: 1½"-3" NST, 4"-5" Storz
- ▶ Packs tighter
- ▶ 25% lighter
- ▶ 10 year warranty
- ▶ Made in the USA

SPECIFY COLOR: Yellow, Blue, Red, Orange or White

BL283 Eco-10 1½" x 50' Hose

BL284 Eco-10 1¾" x 50' Hose

BL286 Eco-10 2½" x 50' Hose

BL287 Eco-10 3" x 50' Hose

SPECIFY HOSE SIZE: 50' or 100'

BL621 SPECIFY COLOR: Yellow, Red, Blue or Orange BL622 COLOR: Yellow

BL621 4" Lightweight DJ Rubber-Lined Attack Hose w/Alum Storz Coupling

BL622 5" Lightweight DJ Rubber-Lined Attack Hose w/Alum Storz Coupling




DARLEY 800 Hose

Polyester Double Jacket 800 psi Hose

- ▶ Designed specifically for the toughest fire fighting jobs
- ▶ Long-lasting synthetic rubber lining and rugged double jacket construction
- ▶ Jackets are woven from the finest high-tensile
- ▶ 100% polyester yarn
- ▶ Tight weave in both jackets mean no drying is required
- ▶ Mildew resistant
- ▶ First choice of many fire departments and industrial users
- ▶ Color: White

10-year warranty

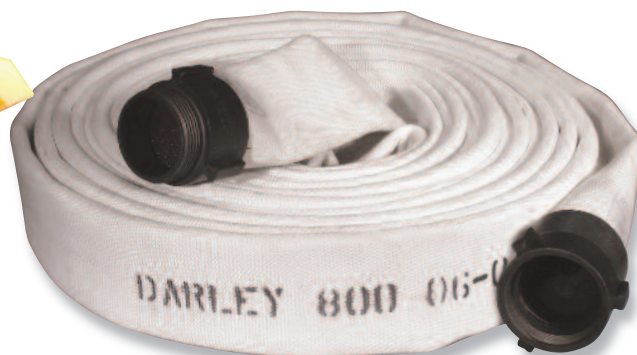

Cat#	Hose Size	Test Pressure	Annual Service Test	Weight per 50' Coupled
R755	1½"	800 psi	400 psi	18 lbs.
T410	1¾"	800 psi	400 psi	19 lbs.
BB154	2"	800 psi	400 psi	26 lbs.
R757	2½"	800 psi	400 psi	32 lbs.
R758	3"	800 psi	400 psi	40 lbs.
2" Standard, 2" x 1½" NH 3" Standard, 3" x 2½" NH				

How To Order Darley 800 or Cord Hose

Length: All hose will be shipped in 50 ft. lengths. 75 ft. or 100 ft. lengths are available.

Couplings: All hose will be shipped with hard-coated, lightweight, rocker lug couplings, unless otherwise specified (brass couplings available for an additional charge).

Threads: NST (NH) threads are standard. IPT (NPSH) available at no additional charge (other threads available for an additional charge).

DARLEY Cord Hose

All-Polyester Double Jacket 800 psi Hi-Tech Polymer Impregnation Hose

Darley - Cord 800 is a unique attack-grade fire hose, developed specifically for the rigorous environment of fire department use.

- ▶ All-polyester double jacket construction
- ▶ Ozone-resistant, high-tensile synthetic rubber liner
- ▶ Most advanced fire hose in the industry
- ▶ Lightweight and extremely durable
- ▶ Outside jacket is thoroughly impregnated with a heat-set High-Tech Polymer, providing durability and ease of maintenance (superior to Hypalon)
- ▶ Completely immune to any effects of mildew

10-year warranty

SPECIFY COLOR: Yellow, Red, Tan, Blue, Black, or Orange

Cat#	Hose Size	Test Pressure	Annual Service Test	Weight per 50' Coupled
U273	1½"	800 psi	400 psi	18 lbs.
U275	1¾"	800 psi	400 psi	19 lbs.
BB155	2"	800 psi	400 psi	26 lbs.
U276	2½"	800 psi	400 psi	32 lbs.
W109	3"	800 psi	400 psi	40 lbs.
2" Standard, 2" x 1½" NH 3" Standard, 3" x 2½" NH				



Requires less storage space,
allowing more room for hose
or equipment

HOSE



A



B



C



D

A. DarQuest Lightweight Hose

Synthetic All Polyester Double Jacket Hose

- ▶ 100% synthetic all polyester double jacket
- ▶ 100% mildew resistant
- ▶ Single-ply synthetic polyurethane liner resists ozone
- ▶ Attack hose designed for Hi-Rise applications
- ▶ Special construction to reduce friction loss by 21%
- ▶ Reduced weight, increased flexibility
- ▶ 5 year warranty against delamination and manufacturer's defects
- ▶ Lining meets and exceed all potable water MIL-H-24606B and NSF-61 (National Sanitation Foundation) standards for the manufacturing of potable use hose
- ▶ Tested and stenciled in accordance with NFPA Standard 1961
- ▶ Color: Orange

Cat#	Hose Size	Test Pressure	Annual Service Test	Weight per 50' Coupled
AB083	1½"	800 psi	400 psi	17 lbs.
AB084	1¾"	800 psi	400 psi	18 lbs.
AB085	2½"	800 psi	400 psi	27 lbs.
AB086	3"	600 psi	300 psi	33 lbs.

B. Magnum 800 - Nylon Hose

This double jacket attack hose is manufactured using tightly woven entangled filament nylon 6.6 yarns in both the inner and outer jackets to promote abrasion resistance and kink-resistance. With higher tensile strength than that of polyester, the Magnum 800 is designed for aggressive fire department use. Magnum 800 meets and exceeds all current NFPA 1961 and 1962 specifications for attack hose. Construction: 100% all synthetic entangled NYLON 6.6 Tube: EPDM rubber lined for the best ozone resistance.

Hose Size	Weight 50' Coupled	Annual Service Test Press.	Hose Size Test Press.
1¾"	18 lbs.	400 psi	800 psi
2½"	28 lbs.	400 psi	800 psi

SPECIFY COLOR:
Yellow or Orange

BH092	1¾" x 50' Magnum 800 Hose
BH093	2½" x 50' Magnum 800 Hose

C. Darley Hi-Rise Hose

Lightweight hose ideal for high-rise packs. At about half the weight of standard double jacketed hose, it is easier and less stressful to carry up stairs. Made of 100% synthetic nylon and completely protected by an abrasion and chemical-resistant orange colored nitrile rubber cover. 1¾" size is coupled with 1½" NST lightweight anodized couplings standard. Tensile strength of 2000 psi. 50' of Darley Hi-Rise Hose coils to only 10". 5-year warranty. Color: hi-visibility orange.

SPECIFY HOSE SIZE: 50', 75' or 100'

AM104	1¾" Darley Hi-Rise Hose
BH087	2½" Darley Hi-Rise Hose

D. Combat Ready Hose

This hose is designed specifically for aggressive interior fire attack operations. The outer jacket is woven from staple polyester yarns over an inner liner consisting of a one-piece extruded through-the-weave tube. Combat Ready is manufactured in a high-visibility white with one red and one blue stripe running the length of the hose. This heat-resistant, drag-resistant and kink-resistant hose has superior friction loss characteristics. **Ship. wt. 18-26 lbs.**

- ▶ Abrasion-resistant
- ▶ High visibility
- ▶ 10-year warranty
- ▶ Low friction loss
- ▶ Ozone resistance

Cat#	Hose Diameter	Service Pressure	Acceptance Pressure	Weight Per 50' Coupled
AS322	1¾"	500 psi	1000 psi	18 lbs.
AS323	2½"	500 psi	1000 psi	26 lbs.

Darley Fire Hose

Features:

- ▶ **Ease of Handling** - Uniquely constructed inner liner with resilient reinforcement helps ensure maximum flow with minimum friction loss
- ▶ **Tough and Durable** - Specially formulated rubber compound provides a tough cover that resists tear and abrasion, snags, hot embers, cuts and most chemicals
- ▶ **Construction** - Extruded Interlocking Matrix
- ▶ **Cover** - 100% Synthetic Nitrile Ribbed Rubber
- ▶ **Reinforcement** - 100% Synthetic Fiber, Circular Woven
- ▶ **Inner Liner** - 100% Smooth, Synthetic Nitrile Rubber
- ▶ **Rating** - 1" - 3" - 600 psi Test, 4" - 5" - 400 psi Test

Applications:

- ▶ Relay and Tandem pumping
- ▶ Crash fire rescue
- ▶ Industrial fire fighting
- ▶ Rural water supply
- ▶ Aerial equipment supply
- ▶ Military



Darley Extruded Rubber Attack Hose

SPECIFY COLOR WHEN ORDERING.

SPECIFY COUPLED LENGTH: 25', 50' or 25'

Cat#	Size	Colors Available
AC659	1"	Yellow Only
AC665	1½"	Blue, Black, Red, Yellow
AC666	1¾"	Blue, Green, Orange, Red, Yellow
AC667	2"	Blue, Red, Yellow
AC668	2½"	Blue, Orange, Red, Yellow
AC669	3"	Blue, Green, Red, Yellow



Darley L.D.H.

UNCOUPLED HOSE AVAILABLE - PRICING UPON REQUEST.

SPECIFY NST with ROCKER LUG or STORZ COUPLING

SPECIFY COLOR: Red, Yellow, Blue or Orange

SPECIFY COUPLED LENGTH: 25', 50' or 25'

Cat#	Size
AC670	4"
AC671	5"
BH005	6"



SUPPLYLINE™ Hose

Double jacket all-polyester hose intended to transfer large volumes of water with minimal friction loss. Lightweight and compact, occupies less space than conventional rubber-covered LDH. Flexible to -60°F. Construction: circular woven, double jacket, 100% virgin spun polyester. Tube: Extruded T.P.U. elastomer - ozone and age resistant.

Hose Size	Threaded Bowl Size	Weight 100' Uncpld.	Proof Press.	Service Test Press.	Burst Press.
4"	4¾"	68 lbs.	600 PSIG	300 PSIG	900 PSIG
5"	5¾"	84 lbs.	600 PSIG	300 PSIG	900 PSIG

SPECIFY HOSE SIZE: 25', 50' or 100'

Hose comes with Storz coupling

BB109	4" SUPPLYLINE™ Hose with Encap Treatment
BB110	5" SUPPLYLINE™ Hose with Encap Treatment



Darley Soft Suction Hose

Light, flexible and strong. All 100% Polyester jacket or nitrile rubber. Will not mildew or rot. Coils smaller and handles easier. Choose from 5" double jacket or rubber covered hose. Priced per 10 foot sections. Other sizes available.



5"x10' Double Jacket Soft Suction Hose

HOSE WITH NH LONG HANDLE DOUBLE FEMALE

BD001	4"	4.5"	5"	6"
4"	•			
4.5"	•	•		
5"	•	•	•	
6"	•	•	•	•

HOSE WITH NH LONG HANDLE FEMALE X STORZ

BD002	4"	4.5"	5"	6"
4" Stz	•	•	•	•
5" Stz	•	•	•	•


5"x10' Rubber Covered Soft Suction Hose

HOSE WITH NH LONG HANDLE DOUBLE FEMALE

BD003	4"	4.5"	5"	6"
4"	•			
4.5"	•	•		
5"	•	•	•	
6"	•	•	•	•

HOSE WITH NH LONG HANDLE FEMALE X STORZ

Cat#	Description	4"	4.5"	5"	6"
BD004	4" Storz	•	•	•	•
BD005	5" Storz	•	•	•	•

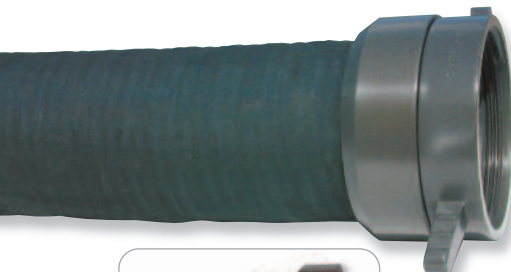

Darley Hard Suction Hose

Smooth bore, hard suction hose for heavy-duty service. Meets NFPA 1961 and 1901. Comes with lightweight anodized couplings installed; long handle female x rocker lug male.

Cat#	Size	Ship. Wt.
T165	2 1/2"	26 lbs.
T166	3"	32 lbs.
T167	4"	46 lbs.
T168	4 1/2"	49 lbs.
T169	5"	59 lbs.
T170	6"	70 lbs.



1 1/2"x10' & 2 1/2"x10' are white/clear ridged helix



Darley Clear PVC Suction Hose

Lightweight - Tight Bend Radius

This lightweight suction hose can be easily handled by one firefighter. Black ridged helix (1 1/2"x10' and 2 1/2"x10' are white/clear) and smooth bore give this hose unrestricted flow. Clear flexible connector web allows for visual monitoring of incoming water. Sold standard in 10-foot lengths, coupled. NST threads standard. *Ship. wt. 45 lbs.*

- ▶ Operates in extreme temperatures
- ▶ Sold complete with end couplings
- ▶ For drafting only

AW135 SPECIFY SIZE:

4" x 10' Storz LH

5" x 10' Storz LH

6" x 10' Storz LH

AA841 SPECIFY SIZE:

1 1/2" x 10' RLF x RLM

2 1/2" x 10' RLF x RLM

3" x 10' RLF x RLM

4" x 10' LHF x RLM

4 1/2" x 10' LHF x RLM

5" x 10' LHF x RLM

6" x 10' LHF x RLM

Barrel Strainers

Cylindrical holes provide a greater area of entrance for the water and allow full capacity pumping. *Made of coated aluminum. NST threads standard. Ship. wt. 7 lbs.*

AM107 SPECIFY SIZE:	2 1/2"	3"	4"	4 1/2"	5"	6"
---------------------	--------	----	----	--------	----	----

Foot Valve Barrel Strainers

Opens and closes automatically when you start and stop drafting water. Allows full flow for capacity but when pumping stops it closes instantly and keeps the pump primed by preventing water from flowing out. Complete with eyebolt for rope. *NST threads. Ship. wt. 28 lbs.*

AM106 SPECIFY SIZE:	2 1/2"	3"	4"	4 1/2"	5"	6"
---------------------	--------	----	----	--------	----	----



A. Spec 187 Forestry Hose

Extremely lightweight all synthetic forestry hose which meets or exceeds all USDA Spec 187 TYPE 2 specifications. This all polyester polyurethane lined fire hose is super light weight, however designed for everyday fire department use. Available in either yellow (according to TYPE 2 spec) or white. Construction: Circular bias woven, single jacket, 100% all polyester. Tube: Extruded TPU—ozone and age resistant. 300 psi service test.

SPECIFY HOSE SIZE: 50' or 100'

BH088	1" White SPEC 187 Type 2 Hose
BH089	1½" White SPEC 187 Type 2 Hose
BH090	1" Yellow SPEC 187 Type 2 Hose
BH091	1½" Yellow SPEC 187 Type 2 Hose

B. RACK HOSE™

All-polyester single jacket interior protection hose for buildings and plants. Lightweight and compact, replaces unlined linen foot for foot. Approximately half the weight of standard rubber lined single jacket hose. Construction: Single jacket, all-virgin filament polyester, circular plain weave. Tube: Extruded T.P.U. elastomer - ozone and age resistant. 250 psi service test.

SPECIFY HOSE SIZE: 50', 75' or 100'

AS176	1½" Rack Hose™ with Brass NST Couplings
AS177	2½" Rack Hose™ with Alum. NST Couplings

C. Darley Booster Hose

For service pumpers we recommend our BG280 and BG281 Booster Hose. It assures all around dependable service and years of trouble-free use. Couplings come in aluminum pin hole. NST.

SPECIFY HOSE SIZE: 50' or 100'

Cat#	Inside Diameter	PSI
BG280	¾"	800
BG281	1"	800
BK222	1½"	200

OTHER THREADS AVAILABLE.

D. Lightweight Booster Hose

- ▶ Lightweight, kink resistant, non collapsible
- ▶ Equipped with full flow expansion ring and 1" lightweight aluminum rocker lug coupling
- ▶ Single jacket, 1005 high tensile strength virgin polyester yarns; smooth TPU lining ensures the minimum friction for maximum flow
- ▶ Highly resistant to ozone abrasion, offering outstanding low temperature performance, excellent mechanical properties, and as good resistance to oil and grease 300 psi service pressure

COLOR: Red SPECIFY HOSE SIZE: 50' or 100'

BL385	1" Booster Hose with Repairable Couplings
-------	---

E. Lightweight Booster Hose


- ▶ 400 psi service test pressure
- ▶ Half the weight of other brands of booster hose
- ▶ Fits standard reels without kinking (4½" radius)
- ▶ Non-collapsible rigid booster reel hose
- ▶ Single jacket with yellow Yermatex® treatment
- ▶ Polyurethane lined yielding low friction loss and easy handling

Couplings

- ▶ BD113 Coupling - Aluminum 1"x1½" NH forestry pin hole set
- ▶ BD114 Coupling - Aluminum 1"x1½" NH R/L

SPECIFY HOSE SIZE: 50' or 100'

Cat#	Description
BD113	¾" Yellow Hose with Coupling
BD114	1" Yellow Hose with Coupling



See pages
192 & 193 for reels

Bowring Personal Firefighter Tool

This tool is proudly made in the U.S.A., designed by firefighters for firefighters. The Bowring is a compact, light weight, multi-purpose tool that will be used at some point on every fire alarm. The Bowring is 8.3" tall, 5.9" wide, .375" thick and only weighs 22 ounces, so it easily fits into your bunker pants.

- ▶ Hose advancement - fits six different size hoses
- ▶ Emergency bailout descender - two different options
- ▶ RIT firefighter drag - hook and drag
- ▶ Gas shut off - two different options
- ▶ Auto extrication - windshield removal, glass ripper
- ▶ O2 wrench
- ▶ Door wedge - just hang it on the hinge
- ▶ Water shut off
- ▶ Mattress hook - hook the wire frame and pull it out
- ▶ Forcible entry tool
- ▶ Spanner wrench - fits pin lugs, rockerlugs, storz lugs
- ▶ Sheet rock ripper - cleanly rips through while looking for hot spots
- ▶ Nance drill - absolutely the fastest most efficient technique ever
- ▶ Denver drill - great for that second story rescue

BL240 Bowring Personal Firefighter Tool

Super Spanner Wrench

Fits any standard 4" and 5" Storz or locking type Storz coupling on one end; the other end fits 1½" to 3" rocker lug type fire hose couplings. Use the center slot as a gas shutoff. Wrench set includes 4 Super Spanner Wrenches and Mounting Plate. *Ship. wt. 1-7 lbs.*

AR230



AR228	Super Spanner Wrench
AR229	Super Spanner Wrench Set
AR230	Super Spanner Mounting Plate

Darley Storz Spanner Wrench Set

Wrench set includes your choice of 2 or 4 Storz Spanner Wrenches mounted on a cast aluminum holder base plate. Holder is powered for corrosion resistance and surface-mountable. Wrenches are made of a lightweight aluminum casting with comfortable grip for 4"-5" Storz connections. *Ship. wt. 2 lbs. (4 wrench set).*



Cat#	Description	Includes
BK374	Spanner Wrench 4" - 5"	1 Wrench
BK375	Double Storz Wrench Set	2 Wrenches & Holder
BK376	Quad Storz Spanner Wrench Set	4 Wrenches & Holder

Wrench Holder Set

Mounts on apparatus for easy accessibility. Convenient, snap action aluminum holder complete with two spanners for any style or size coupling from 1¼" to 4". Also includes an adjustable hydrant wrench for pentagon nuts up to 1¾" or square nuts to 1¼". Hydrant wrench fits 2½" couplings. Ductile iron zinc plated head. Handle is steel zinc plated. *Ship. wt. 9 lbs.*


H711	Holder with Two Wrenches
L780	Holder with Two Spanner Wrenches and Hydrant Wrench

BL240



AR229 - Includes four Super Spanner wrenches and mounting plate

BK375

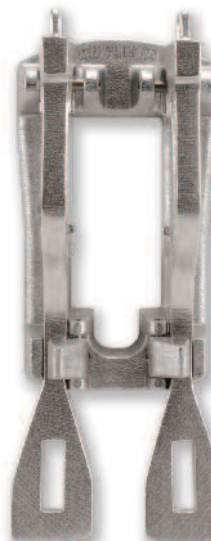

L780



H711



A



B



C

best
seller

A. Darley Spanner Wrench

Lightweight aluminum spanner. Includes belt hook eye, hammer head and gas cock shut-off. Fits couplings from $\frac{3}{4}$ " to 4". *Ship. wt 1 lb.*

B397 Darley Spanner Wrench

B. Double End Spanner Wrench

Double end hole type spanner, fits $\frac{3}{4}$ " and 1" booster hose couplings and 2 $\frac{1}{2}$ " hole type fittings. *Ship. wt 1 lb.*

L800 Double End Spanner Wrench

C. Folding Spanner Wrench/Belt Ring

Ultra-light non-sparking folding spanner with extra wide pry end, and gas shut-off. Fits couplings from $\frac{3}{4}$ " to 6". *Ship. wt 1 lb.*

AZ357 Folding Spanner Wrench/Belt Ring

Hydrant Wrenches

T240 - Adjusts to pentagon nuts from $1\frac{1}{4}$ " to $1\frac{3}{4}$ " or square nuts to $1\frac{1}{4}$ ". Replaceable brass insert protects hydrant nut. Also fits 2 $\frac{1}{2}$ " to 4 $\frac{1}{2}$ " couplings.

E119 - Malleable iron, cadmium plated hydrant wrench adjusts to pentagon nuts from $1\frac{1}{4}$ " to $1\frac{3}{4}$ " or square nuts to $1\frac{1}{4}$ ". Fits couplings from 1 $\frac{1}{2}$ " to 6".

C285 - Zinc plated ductile iron head and $\frac{7}{8}$ " steel handle. Opening accepts any pentagon nut up to $1\frac{3}{4}$ " or $1\frac{1}{4}$ " square nut. Fits 2 $\frac{1}{2}$ " pin or rocker lug. *Ship. wt. 5 lbs.*



T240



E119



C285

T240 Hydrant Wrench

E119 Hydrant Wrench

C285 Hydrant Wrench

Premium Quality Spanner Wrench

It's made from aerospace alloy aluminum. This means it's ultra-light and super strong. Plus, because it is non-sparking, it's safe to use in hazardous situations. You'll never go wrong with the best. Compatible with most brackets. Fits up to 3 $\frac{1}{2}$ " couplings, has gas cock shutoff. *Ship. wt. 1 lb.*



AJ281 Premium Quality Spanner Wrench

Hydrant Wrench

new

- ▶ Fits hydrant stems both 1" (square and pentagon) and 1.5" (pentagon)
- ▶ Will work on worn stems
- ▶ No more adjusting, just put the open end over the hydrant stem and pull the handle, the harder you pull, the tighter the grip
- ▶ To release, just relax and lift it off the stem
- ▶ Will actually stay on the stem and not in the mud while you work
- ▶ The spanner end of the wrench is designed for use on 2 $\frac{1}{2}$ " and larger fittings
- ▶ Weight: 5 lbs.
- ▶ Length: 18"



BL425 Hydrant Wrench

Pentagon



Hose Hoist

- ▶ For raising/lowering hose, ladders, etc. to and from the roof or through windows
- ▶ Akrolite™ construction



J735 Hose Hoist

Hose & Ladder Strap

Use the hose and ladder strap to advance hose, drag pre-connected hose from the truck or carry non-charged hose up a ladder. Tough nylon webbing with lightweight aluminum alloy drag handle on one end and adjustable hook end on other. Fits up to 2 $\frac{1}{2}$ " hose. *Ship. wt. 1 lb.*



M684 Hose & Ladder Strap

Large carrying capacity



Gripper Hose System

An Effective Way Of Transporting Hose

The Gripper Hose System consists of three heavy duty nylon straps, with a padded shoulder sling, all sewn together to create a hose harness. The gripper has a padded high visibility shoulder sling, with three 2" wide, 42" long, 3000-pound strength webbing to secure the hose. Utilizes cam buckles and torque rings and is easily opened with a gloved hand. The 42" long straps have the capacity to hold more hose than the average firefighter can carry. **Ship. wt. 4 lbs.**

AF151 Gripper Hose System

Hose Vice

Carry More Hose Easier

The Hose Vice is the latest in the evolution of our hose carrying systems. This product incorporates many ideas given to us by our customers. Features include: an updated shoulder strap, which is adjustable and removable. The shoulder strap is long enough that a firefighter can carry the bundle across the body for better balance. Two fire-fighters can also carry The Hose Vice. Handles have been incorporated into the ends of the four straps, along with 2 molded rubber grips on top. Two firefighters simply utilize these handles. The overall length is 35" and each strap has an adjustable circumference range of 20" - 38". Capacity is 150 OR 200' of 1 1/4" hose as shown. 3M reflective has been added to increase visibility. Made in the USA. **Ship. wt. 3 lbs.**

AK187 Hose Vice

Double Donut Strap

The Double Donut Strap holds two 50-foot sections of 1 3/4" hose. Consists of two heavy-duty nylon webbing straps with a Velcro® closure attached to a 3-inch center ring and shoulder strap. **Ship. wt. 3 lbs.**

- ▶ Easy storage - hose stacks and compactly fits into compartments
- ▶ Shoulder strap aids firefighters in carrying and deploying hose
- ▶ Pre-coiled hose gives you the option to add on to an existing hose lay, or reduce a larger line

AJ283 Double Donut Strap

High-Rise Hose Strap

This strap securely holds 100' of 1 3/4" double jacketed fire hose, the most commonly used attack hose in the fire service. Ideal for cross lays, quick attack lines or standpipe operations. Strap consists of four quick release Velcro® closures, with two molded rubber grip handles on top for easy carrying and 3M reflective for added visibility. Hose remains organized and ready for rapid and easy deployment. Works well with all fire apparatus. Enables a firefighter to grab a fold of hose, drape it over your shoulder or SCBA. Once at your point of attack, straps can be opened and hose advanced. Know exactly how much hose you have, and how far you can go.

BB065 High-Rise Hose Strap


Hose Washer

Cleans your dirty and caked hoses. Simply connect the hose washer to a fire hydrant or pumper (40 to 60 psi recommended) and watch the action of the water automatically feed the hose through the washer. Washer produces a conical multi-jet water stream that cleans effectively and economically. AJ515 - automatic feed washer, AJ453 - manual feed washer.
Ship. wt. 15 lbs.

AJ515	Hose Washer for Hose Up to 3" Diameter
AJ453	Hose Washer for Hose Up to 5" Diameter

Brute X-Pander


Weighing 45 pounds, 32% less than the Brute I, the X-Pander is perfect for in-house or mounted in a service van for field repairs. Requires 50% fewer strokes to expand and 75% fewer strokes to release than the Brute I. The X-Pander can couple from 1" through 3" couplings.
Ship. wt. 50 lbs.

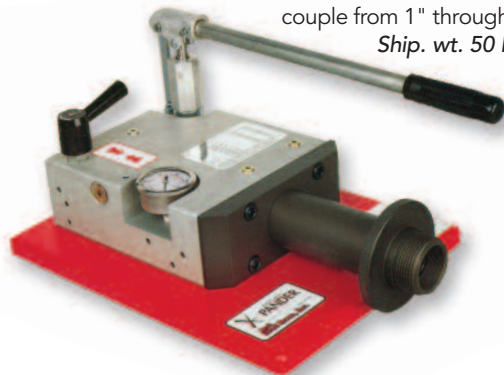

AZ356 Brute X-Pander

Hose Cutter

- ▶ Heavy duty aluminum construction
- ▶ Powder coated for a tough, hard finish
- ▶ Easy and safe to use
- ▶ Ratchet handle raises & lowers steel blade
- ▶ Handgrips for easy transporting
- ▶ Makes clean, straight cuts
- ▶ Cuts hose up to 6"

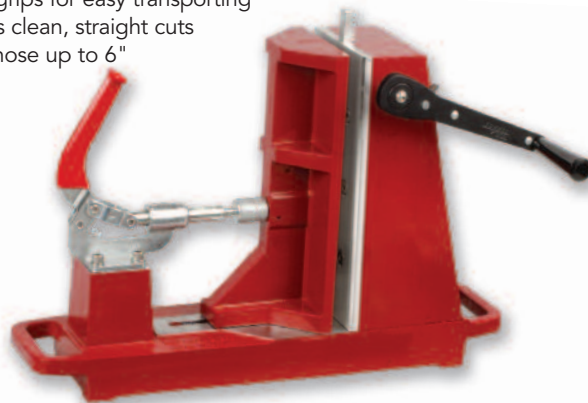

BH170 Hose Cutter

Stainless Steel Hose Washer

A powerful automatic feed washer for up to 5" hose. Dual conical water jet float the hose while removing soluble contaminants. The hose washer can be simply mounted with a length of hose to a pumper, or hydrant. Maintain water pressure at 60 to 80 psi to obtain best results. Sturdy construction in stainless steel ensures very long reliable service even under the most adverse conditions. **Ship. wt. 10 lbs.**



AW136	Hose Washer for Hose Up to 3 1/2" Diameter
AW137	Hose Washer for Hose Up to 5" Diameter

Expansion Units

Complete expansion unit assembly for attaching 1" through 6" couplings. Note: Red Head expansion units are compatible with some other manufacturers' expanders. Please specify the manufacturer and model.
Ship. wt. 1 lb.



AF202	1" with Drawbar (Pull Type)
AF204	1 1/2" with Drawbar
AF209	1 3/4" with Drawbar
AF214	2 1/2" with Drawbar
AF217	3" x 2 1/2" with Drawbar
AF218	3" without Drawbar

Expansion Rings

The metal used is a scientifically correct mixture which is best adapted for the purpose of giving the maximum coefficient of expansion without fracture. **Ship. wt. 1 lb.**



Cat#	O.D.	Length
41602	1"	1"
41603	1 1/2"	1"
41604	2 1/2"	1 1/2"
41605	3"	2"
41607	4"	2"
41608	4 1/2"	2"
41609	5"	2"
41610	6"	2"

Heavy-Duty Expansion Ring Couplings

Tough extruded lightweight, high strength aluminum alloy. For heavy municipal and industrial use. **Ship. wt. 3 lbs.**



Cat#	Hose	Thread	Min. Bowl	Max. Bowl
AJ284	1 1/2"	1 1/2"	1 11/16"	2"
AJ285	2 1/2"	2 1/2"	2 11/16"	3 1/16"
AJ286	3"	2 1/2"	3 3/16"	3 13/16"

Quic-Bridge® Hose Guards

One of the most economically priced hose bridges available and requires little storage space. Made of extruded aluminum to accommodate 16" or 24" widths (5" hose). Each bridge consists of one center hose guard and two ramps; neoprene feet hold the bridge firmly in place and vehicle tires do not come into contact with the hose line. Remove one ramp and bridge can be used to jump a curb. *Ship. wt. 192 lbs.*



Quick and Easy
Ramp Assembly

SOLD IN SETS
OF TWO BRIDGES

AM098	Hose Ramp, 16"/set
AM099	Hose Ramp, 24"/set

Rubber Hose Bridges

Bridges give you economical hose line protection for up to 5" LDH hose lines. They are 12" wide and can be interlocked to any width. Equipped with reflective safety strips for added visibility. Made of Fiber Reinforced Rubber.



SOLD IN SETS OF TWO BRIDGES

		Ship Weight
AW133	Up to 4" Hose	76 lbs.
AW134	Up to 5" Hose	84 lbs.

Hose Ramps

No rust aluminum supports up to 50,000 loads. Ramp are traction ribbed and stiffened for extra strength. Other features include non-skid bottom, one piece construction and won't bend or sag. Easily stack sets for convenient transport. *Ship. wt. 90 lbs.*

SOLD IN SETS OF SIX 2-FOOT SECTIONS

J545	Aluminum Hose Ramp for up to 3" Hose
------	--------------------------------------

Hose Shutoff Clamp

A lightweight shutoff clamp for double jacket hose up to 3". Press down on handle and the rubber jaws lock in place. Comes complete with mounting bracket. *Ship. wt. 18 lbs.*

Includes Mounting Bracket


H875	Hose Shutoff Clamp
------	--------------------



Hose Rollers


Remove Air and Water Easily From Your Hose

Hose Rollers are designed to remove air and water from your 1½" to 5" single or double jacket hose. Heavy duty nylon rollers are durable for years of dependable service. Simply feed the hose through and walk the length of the hose. Two-person model AF155 is hinged at one end to clamp around the hose. One-person model AF154 slips over the end of the hose and the handles compress the rollers against the hose. *Ship. wt. 10 lbs.*



AF154

Hose not included



AF155

AF154	One-Person Hose Roller
AF155	Two-Person Hose Roller


Hose Jacket Sleeve Stops A Leaky Hose

For 2½" hose

Use for emergency repair of burst/leaky hose or even as an emergency adapter for the connection of two hose lines with different threads in situations where pressures do not exceed 150 psi. Made of reinforced cast Akrolite® body with molded neoprene inner liner. Fits all 2½" hose (from 2¾" to 3⅝" O.D.) Measures 13" long. Red only. *Ship. wt. 20 lbs.*



B683	Hose Jacket Sleeve
------	--------------------



Hebert Hose Clamp

Saves time and labor when removing burst hose, relieving pressure on a line or changing fittings without damaging hose. Simple to operate and releases quickly. Dimensions: 12.5"Hx15"Wx5.5"D, 6" Opening. *Ship. wt. 24 lbs.*

G301	Hebert Hose Clamp for up to 3" Hose
G30102	Hebert Hose Clamp for up to 6" Hose
G30101	Running Board Bracket



Leather Hose Jacket

Made of top-grain, heavy-duty leather and fits 2½" hose. So handy, simple and inexpensive that every apparatus should have a couple. Great for ISO rating points. *Ship. wt. 1 lb.*

B82301	Leather Hose Jacket
--------	---------------------

