

## Halotron I Clean Agent For A, B & C Fires

The most broadly tested and approved 1211 replacement product available that's safe, environmentally friendly, effective and easy-to-use! Halotron is a clean fire extinguishing agent that is discharged as a precisely dispersed rapid evaporation liquid. It performs in a manner similar to Halon 1211 but leaves no residue and is effective against Class A, B and C fires. The primary extinguishing mechanism is the absorption and removal of heat from the combustion zone. Halotron utilizes an HCFC (HydroChloro-Fluorocarbon), non-conductive based agent pressurized with argon. What's more, the Ozone Depletion Potential (ODP) is nearly zero; that's twelve times lower than the EPA maximum. Each extinguisher has a bar coded label for documenting location, inspection, repair, etc. Ideal for use on electrical equipment, computers, vehicles, laboratories and aircraft rescue firefighting. EPA, FAA, U.S. Coast Guard, NFPA approved. Bracket included.

Cat#	Size	UL Rating	Valve	Application	Bracket
AR089	1.4 lbs.	1B:C	Alum.	Nozzle	Wall/Vehicle
AR090	2.5 lbs.	2B:C	Alum.	Nozzle	Wall/Vehicle
AR091	5 lbs.	5B:C	Alum.	Nozzle	Wall/Vehicle
AR092	11 lbs.	1A:10B:C	Brass	Hose & Nozzle	Wall
AR093	15.5 lbs.	2A10B:C	Brass	Hose & Nozzle	Wall



## Regular B:C Fire Extinguishers

Siliconized sodium bicarbonate based dry chemical, with free-flowing and non-caking additives. Smothers fires in flammable liquids and pressurized gases and is electrically non-conductive. Bar coded labels. Bracket included.

Cat#	Size	UL Rating	Valve	Application	Bracket
S255	2½ lbs.	10B:C	Alum.	Nozzle	Wall/Vehicle
S256	5 lbs.	10B:C	Alum.	Nozzle	Wall/Vehicle
AF568	6 lbs.	40B:C	Brass	Hose & Nozzle	Wall
AF566	10 lbs.	60B:C	Alum.	Hose & Nozzle	Wall
H782	10 lbs.	60B:C	Brass	Hose & Nozzle	Wall
AF567	20 lbs.	120B:C	Alum.	Hose & Nozzle	Wall
H783	20 lbs.	120B:C	Brass	Hose & Nozzle	Wall



## Purple K B:C Potassium Bicarbonate Extinguishers

Specially fluidized and siliconized potassium bicarbonate dry chemical, effective on flammable liquids and pressurized gases and is electrically non-conductive. Bar coded labels. Bracket included.

Cat#	Size	UL Rating	Valve	Application	Bracket
AF569	2½ lbs.	10B:C	Alum.	Nozzle	Wall/Vehicle
AF570	5 lbs.	30B:C	Alum.	Hose & Nozzle	Wall/Vehicle
AF572	10 lbs.	80B:C	Brass	Hose & Nozzle	Wall
AF571	20 lbs.	120B:C	Alum.	Hose & Nozzle	Wall
AF573	20 lbs.	120B:C	Brass	Hose & Nozzle	Wall



## Extinguisher Chemical Refill

### 90% or More Active Firefighting agents

Made to recharge your fire extinguisher. Manufactured to rigid quality specifications to assure high-performance and superior flow characteristics. Ship wt. 50 lbs.

Cat#	Type	Chemical
AF561	ABC	Monoammonium Phosphate
AF562	BC Reg.	Sodium Bicarbonate
AF563	BC Purple K	Potassium Bicarbonate



## Extinguisher Vinyl Covers

- ▶ Discourage tampering
- ▶ Vinyl coated cover
- ▶ Bright red color
- ▶ Velcro® closure
- ▶ Fits 5 to 10 lb. D.C. extinguisher
- ▶ Dimensions: 12½"x20"



P854 Extinguisher Cover

FIRE PROTECTION

## Peerless Pump Type Water Extinguishers

Rated 2A, the Peerless Pump Type Water Extinguishers can be filled while in use and are simple-to-operate. You can test it without loss of water by directing the stream back into the tank. The operator controls the discharge. Moving parts made of corrosion-resistant brass and copper. Immediate operation; no priming needed.



Description	2 1/2 Gallon Size	5 Gallon Size
Polished Copper	AF577	AF578
Chrome Plated Copper	R588	R591
Red Enamel Copper	R587	R590
Red Enamel Steel	H897	H798
Vehicle Bracket	R589	R592

## Carbon Dioxide Extinguishers

Discharges a white cloud of "snow" which smothers a fire by eliminating its oxygen. Effective for Class B flammable liquid fires and is electrically non-conductive. Aluminum cylinder. *Bracket included.*



Cat#	Size	UL Rating	Valve	Application	Bracket
H790	5 lbs.	5B:C	Brass	Horn	Wall
H791	10 lbs.	10B:C	Brass	Hose and Horn	Wall
H792	15 lbs.	10B:C	Brass	Hose and Horn	Wall
H793	20 lbs.	10B:C	Brass	Hose and Horn	Wall

## ABC Fire Extinguishers

Easy-to-use and maintain. Specially fluidized and siliconized mono ammonium phosphate dry chemical. Insulates Class A fires and coats the surface to which it is applied. Smothers and breaks the chain reaction of Class B fires. Bar coded labels. Electrically non-conductive. *Bracket included.*



Cat#	Size	UL Rating	Valve	Application	Bracket
P614	2 1/2 lbs.	1A:10B:C	Alum.	Nozzle	Wall/Vehicle
P615	5 lbs.	2A:10B:C	Alum.	Hose & Nozzle	Wall/Vehicle
AF557	5 lbs.	2A:10B:C	Brass	Hose & Nozzle	Wall
AF553	5 lbs.	3A:40B:C	Alum.	Hose & Nozzle	Wall/Vehicle
AF554	10 lbs.	4A:80B:C	Alum.	Hose & Nozzle	Wall
AF558	10 lbs.	4A:80B:C	Brass	Hose & Nozzle	Wall
AF555	20 lbs.	20A:120B:C	Alum.	Hose & Nozzle	Wall
J559	20 lbs.	20A:120B:C	Brass	Hose & Nozzle	Wall

## Class D Fire Extinguishers

Safest unit on the market, with long hose and wand reach for operating safely. OSHA requires this type of extinguisher in manufacturing areas. Sodium Chloride based is specially designed to be used on burning metals, such as magnesium, sodium, potassium, sodium-potassium alloys, uranium and powered aluminum. Copper Agent based is specially designed for use on lithium and lithium alloy fires. 30 lbs., hose & applicator. *Wall bracket included.*

AF559	Sodium Chloride
AF560	Copper Agent



## Water & Foam Stored Pressure Extinguishers

Easy-to-use, maintain and service. Stainless steel cylinders, chrome-plated brass valve, and bar coded labels.

**Water Extinguisher:** Utilizes the cooling, soaking and penetrating effect of 45-55 ft. stream of water for Class A fires. Optional loaded stream/anti-freeze charge protects from freezing.

**Foam Extinguisher:** Uses FFFP foam for Class B fire fighting capability. *Bracket included. Ship. wt. 9 lbs.*

### OPTIONS

AF579	Water Conditioner, 1 1/2 oz. Bottle
BA180	Loaded Stream/Anti-Freeze Charge
AF581	FFFP Foam Refill


Cat#	Type	Size	UL Rating	Application	Bracket
H795	Water	2 1/2 gal.	2A	Hose & Nozzle	Wall
AF580	FFFP	2 1/2 gal.	3A:20B	Aspirating Nozzle	Wall





## Heavy-Duty Extinguisher Brackets

Brackets listed below are for Amerex extinguishers, but will fit any other extinguisher with same size cylinder. If you are unsure or are in need of a bracket not listed, please call your Darley representative.



Type	Size	Rating	AF868	AF863	AF864
Halotron	5 lbs.	5B:C	•		
CO2	5 lbs.	5B:C		•	
CO2	10 lbs.	10B:C			•
CO2	15 lbs.	10B:C			•
ABC	5 lbs.	2A:10B:C	•		
ABC	5 lbs.	3A:40B:C	•		
ABC	10 lbs.	4A:60B:C		•	
ABC	20 lbs.	20A:120B:C			•
BC	5 lbs.	10B:C	•		
BC	6 lbs.	40B:C		•	
BC	10 lbs.	60B:C		•	
BC	20 lbs.	120B:C			•
Purple K	5 lbs.	30B:C	•		
Purple K	10 lbs.	80B:C		•	
Purple K	20 lbs.	120B:C			•
Water	2.5 gal.	2A			•
Foam	2.5 gal.	3A:20B			•

## Extinguisher Cabinets



BB021

BB020

BB022

Cat#	Description	Size
BB020	Red/Black Extinguisher Cabinets	26"Hx9"Wx9"D
BB021	Red/Black Extinguisher Cabinets	27 1/2"Hx10"Wx8 1/2"D
BB022	Red/Black Extinguisher Cabinets	27 1/2"Hx22 1/2"Wx9"D
BB023	Extinguisher Cabinets	32 1/2"Hx12 1/2"Wx10 1/2"D
BB024	Extinguisher Cabinets	23"Hx7 1/2"Wx7 1/2"D

## Universal Vehicle Extinguisher Bracket

Universal brackets have heavy-duty steel back with weather & scratch resistant polyurethane enamel paint finish. Large rubber grommets on bracket back cushion cylinder while strong securing cords keep the cylinder in place. Securing cords easily attach for either left or right hand closings and are impervious to extreme temperatures. There are no moving metal parts to break, loosen or wear out and the bracket is adjustable to several cylinder sizes. *Ship. wt. 3 lbs.*

AF869	Bracket for 2 1/2 & 5 lb. Dry Chemical Extinguishers
AF870	Bracket for 6 and 10 lb. Dry Chemical Extinguishers, 5 lb. CO <sub>2</sub> Extinguishers, 11 & 15.5 lb. Halotron 1 Extinguishers
AF871	Bracket for 20 lb. Dry Chemical Extinguisher, 2 1/2 gal. water extinguisher, 15 & 20 lb. and CO <sub>2</sub> Extinguishers

## Dry Chemical Wheeled Fire Extinguisher

- ▶ Brass, chrome-plated operating valve
- ▶ 240 psi operating pressure
- ▶ Heavy-duty steel cylinder, carriage and hose hanger assembly
- ▶ Quick-release 25 ft. discharge hose with brass/chrome-plated ball type shut-off nozzle
- ▶ Large color coded Mylar instruction labels
- ▶ "Ultra" corrosion-resistant red polyurethane paint finish
- ▶ Smooth rolling 12 1/2" semi-pneumatic rubber-tired wheels
- ▶ DOT 4BW240 agent cylinder
- ▶ Operating temp; -40°F to +120°F
- ▶ U.S. Coast Guard Approved

Cat#	Agent	UL Rating	Capacity	Hose Length	Hose Dia.
AF582	ABC	30A:160B:C	50 lbs.	25 ft.	1/2"
AF583	Regular	160B:C	50 lbs.	25 ft.	1/2"
AF584	Purple K	160B:C	50 lbs.	25 ft.	1/2"
AF585	ABC	40A:240B:C	125 lbs.	50 ft.	3/4"
AF586	Regular	240B:C	150 lbs.	50 ft.	3/4"
AF587	Purple K	320B:C	125 lbs.	50 ft.	3/4"
AF598	Carbon Dioxide	20B:C	100 lbs.	40 ft.	1/4"

Other styles available. Call your Darley representative for information and pricing.



## Type I Safety Cans

**Easy-to-Fill and Easy-to-Use, and the Economical Choice for Flammables**

Compliant Type I Safety Cans are designed with a single spout to filling and pouring. The self-closing, leakproof lid controls vapors and provides security from spills and leaks.

- ▶ Fully compliant - meets OSHA and NFPA Code 30
- ▶ Premium 24-gauge coated steel body and handle durability and chemical resistance
- ▶ Quality backed by exclusive 10-year warranty



D89802 One-Gallon Type I Safety Can

D89803 Two-Gallon Type I Safety Can

D89804 Five-Gallon Type I Safety Can

## Type II AccuFlow™ Transfer Cans

**Combine Safety with Maximum Convenience When Handling Flammables**

Compliant Type II AccuFlow™ Safety Cans offer additional convenience with two openings: top opening with ergonomically designed life lever for easy filling, and a second opening equipped with a flexible metal hose for targeted pouring into small apertures. The 5/8" x 9" nose also provides a safe bonding path to the receiving vessel. Patented, innovative manifold automatically vents to provide fast, precision, slug-free pouring. *Ship. wt. 9 lbs.*

5/8" hose



AK045 One-Gallon Transfer Safety Can

AK046 Two-Gallon Transfer Safety Can

AK047 Five-Gallon Transfer Safety Can

## Safety Can Cabinets

**Central Storage for Your Flammable Liquids**

Now you can have on-site storage for your flammables or combustibles. These cabinets offer hands-on easy access with minimal exposure plus provide central storage for your corrosive liquids. They save traveling time, minimize employee exposure and seal off your flammables when temperatures get too high. As high-quality safety storage cabinets, they're designed to meet safety requirements in a variety of applications such as laboratories, production areas, schools, hospitals etc., wherever space for flammable and hazardous liquids is needed and at a premium. For even more space-saving storage try the Undercounter Storage Cabinets. They mount flush with other cabinetry and feature vent openings in back wall. *Ship. wt. 190 lbs.-387 lbs.*

### Check Out These Outstanding Features:

- ▶ **Double-Wall Thermal Barrier:** Cabinet puts an 18-gauge, double-wall insulated air between you and your flammable liquids
- ▶ **Maximum Storage/Efficiency:** Reinforced shelves have built-in troughs, and leakproof wells to contain spills
- ▶ **Locking Mechanism:** 3-point lock with fail-safe closing mechanism
- ▶ **Tri-Lingual Label:** English, Spanish, and French
- ▶ **Dual Vents:** Vents are strategically placed with built-in flash arresters
- ▶ **Leakproof Sill:** Base of cabinet is a full 2" deep to contain spills
- ▶ **Superior Powder Finish:** Powder coat, high-gloss, paint finish resists solvents, acids and alkalies
- ▶ **Adjustable Leveling Feet:** Adjustable at all four cabinet corners to ensure proper alignment for tight door closure

AK048



AK050

Undercounter cabinets



AK052

CABINETS COME IN HI-GLOSS YELLOW ONLY

Cat#	Description	Size	Shelves	Doors	Dimensions
AK048	Safety Can Storage Cabinet	60 gal.	2	2	65" x 34" x 34"
AK049	Safety Can Storage Cabinet	45 gal.	2	2	65" x 43" x 18"
AK050	Safety Can Storage Cabinet	30 gal.	1	2	44" x 43" x 18"
AK051	Undercounter Storage Cabinet, 22-gal. with Manual Closing Doors	22 gal.	1	2	35" x 35" x 22"
AK052	Undercounter Storage Cabinet, 22-gal. with Self-Closing Doors	22 gal.	1	2	35" x 35" x 22"

Cabinets comply with OSHA regulations and are designed to meet NFPA.

# Lexan Combination Nozzles

## A. 1½" Straight Stream/Fog Nozzle

Constructed of polycarbonate and precision molded from the latest developments in the industry. Ideal for industrial and commercial installations, as well as small fire companies. *Available Threads:* 1½" NST, SIPT(NPSH); *Height:* 4⅝"; *Gallonge:* 75 gpm. *Ship. wt.* 1 lb.

L685 1½" Straight Stream/Fog Nozzle

## B. ¾" and 1" Combination Fog Nozzle

Molded from polycarbonate material. Designed for booster lines, and small diameter hose. Ideal for fighting grass fires. *Available Threads:* 1" NST, SIPT(NPSH) & ¾" GHT; *Height:* 4¾"; *Gallonge:* 1"-22 gpm, ¾"-8 gpm. *Ship. wt.* 1. lb.

M767 ¾" and 1" Combination Fog Nozzle



## Outside Hose House

Storage house is a safe and convenient hose and equipment storage house. Designed to accommodate up to 300' of 2½" hose as well as nozzles, fire axes and other fire fighting equipment. Available in your choice of 16 gauge cold-rolled steel, galvanized steel or aluminum housing (red finish). Weather-proof sloping top and side louvers for ventilation. Double reinforced doors have continuous hinges with two-point locking chrome handle. Features adjustable center shelf and "Fire Hose" decal. *Ship. wt.* 195 lbs.

SPECIFY LEG SIZE: 12", 18" or 24"

U817	Outside Hose House, Steel
AJ292	Outside Hose House, Galvanized Steel
AJ293	Outside Hose House, Aluminum



## Quikfit Sprinkler Shut Off

Simple, quick, positive shutoff for many types of sprinkler heads with openings of approximately ⅞" wide by 1" high or ¾" wide by 1⅞" high. Allows sprinkler heads out of fire area to be shut off. *Ship. wt.* 1 lb.



G423 Quikfit Sprinkler Shut Off

## Angle Valves

Cast brass body. NPT Female by any standard male hose thread outlet. *Ship. wt.* 12 lbs.

300 PSI

SPECIFY MALE OUTLET

H88801	1½" Angle Valve
H88802	2½" Angle Valve



## Hose Pin Rack Units

Darley® Pin Rack Units are designed for standpipe use and are assembled and packaged before shipment. Furnished with a rough brass valve, red enamel rack and machined brass nipple, couplings and nozzle. They consist of U.L. listed and F.M. approved valve, rack hose and nozzle as follows:

**1½" Assembly:** Includes 1½" angle valve, hose rack, 1½" rack nipple, 1½" rack light hose, 1½" couplings, pin or rocker lugs and 1½" fog nozzle.

**2½" Assembly:** Includes 2½" angle valve, hose rack, 2½" rack nipple, 2½"x1½" reducer, 1½" rack light hose, 1½" couplings, pin or rocker lugs and 1½" fog nozzle.

1½" ASSEMBLY - SPECIFY THREAD TYPE		Ship. wt.
T32301	1½" Assembly with 50' of Hose	14 lbs.
T32302	1½" Assembly with 75' of Hose	17 lbs.
T32303	1½" Assembly with 100' of Hose	19 lbs.
2½" ASSEMBLY - SPECIFY THREAD TYPE		Ship. wt.
T32304	2½" Assembly with 50' of Hose	22 lbs.
T32305	2½" Assembly with 75' of Hose	24 lbs.
T32306	2½" Assembly with 100' of Hose	25 lbs.





## Thermal Scanner System

The RedHawk™ thermal scanner is the latest and most advanced addition to the time-proven line of thermal scanners. Designed specifically for detecting hotspots, SmartSight™ Technology provides superior hot spot detection a higher contrast ratio than other thermal sensors - up to 1000x greater than TICs and IR thermometers. The RedHawk™ includes Class II red aiming laser for pin point location of hot spots inside structures, walls, ceiling, etc. The RedHawk™ also uses a loud, audible alarm to alert the presence of a hot spot.

- ▶ SmartSight™ Technology
- ▶ Lightweight - less than 1 lb.
- ▶ Rugged waterproof storage case, carrying pouch, retractable lanyard
- ▶ 3 year unconditional warranty
- ▶ Operates through glass
- ▶ AA batteries (included)
- ▶ Help needed alarm

**DYN-OPTICS**

BK043 RedHawk™ Thermal Scanner System



## Infrared Thermometers

The world's most popular, professional, handheld, non-contact thermometer using infrared technology to measure the temperature of materials up close or from a distance in less than a second. Lightweight, compact and easy to use. You simply aim, pull the trigger and read the temperature on a large, backlit LCD display. Safely measure hot, hazardous or hard-to-reach materials without contaminating or damaging material's surface. Check all the great features. *Ship. wt. 2 lbs.*

### BL086:

- ▶ Dual laser sighting
- ▶ Temperature Range: -76° to 932° F (-60° to 500° C)
- ▶ Distance/Spot: 12:1
- ▶ Accuracy +/- 2%
- ▶ Captures maximum temperature during scan
- ▶ Back-lit LCD display
- ▶ Batteries provide 180 hours of continuous operation

### BK247:

- ▶ Dual laser sighting
- ▶ Temperature Range: -76° to 1157° (-60° to 625° C)
- ▶ Distance/Spot: 16:1
- ▶ Accuracy +/- 2%
- ▶ Amber backlit LCD Display
- ▶ Uses 2 AAA batteries

BL086 Laser Thermometer 932°F 12:1

BK247 IR Thermometer with Dual Lasers



## Professional IR Thermometers

The Professional IR Thermometers are a heavy-duty IR dual-laser thermometer with advanced temperature processing, high resolution optics and built-in LED Flashlight. Advanced system-on-chip engineering is the key ingredient of the series of long range infrared thermometers.

### BD191:

- ▶ Dual laser sighting
- ▶ Temperature Range: -76° to 1600° F (-60° to 871° C)
- ▶ Distance/Spot: 30:1
- ▶ Bright, built-in laser
- ▶ Accuracy +/- 2%
- ▶ Back-lit LCD display
- ▶ Auto Off
- ▶ Batteries provide 180 hours of use
- ▶ Programmable High and Low audible temperature alarms

### BK248:

- ▶ Dual laser sighting
- ▶ Hi/low alarm
- ▶ MAX, MIN, DIF and AVG temp. settings
- ▶ Distance/Spot: 50:1
- ▶ Accuracy +/- 2%
- ▶ Temperature Range: -76° to 1832° (-60° to 1000° C)
- ▶ High intensity white LED flashlight
- ▶ High and Low audible temperature alarms

BD191 Therma Twin Long Range IR Thermometer

BK248 Extra Long Range IR Thermometer



**edarley.com**  
Shop online for more  
thermometers 24/7 at  
[www.edarley.com](http://www.edarley.com)


# Salvage-Master Wet Vacuum

## Highly Efficient Wet Vacuum Unit

Salvage-Master's ability to remove water from deep floor cracks, carpets, tile, concrete, asphalt and wood floors greatly reduces overall fire or spill damages and subsequent insurance loses. In addition, Salvage-Master's fast action performance (the 5.9 gallon tank fills in 18 seconds and empties in 14 seconds) helps prevent warpage, curling floors and seepage through ceilings. As an extra convenience, Salvage-Master features a special float device that automatically activates a high-pitched sound to indicate when the tank is full. Comes complete with a rubber squeegee, GFCI plug, and 1-year warranty.



BH142

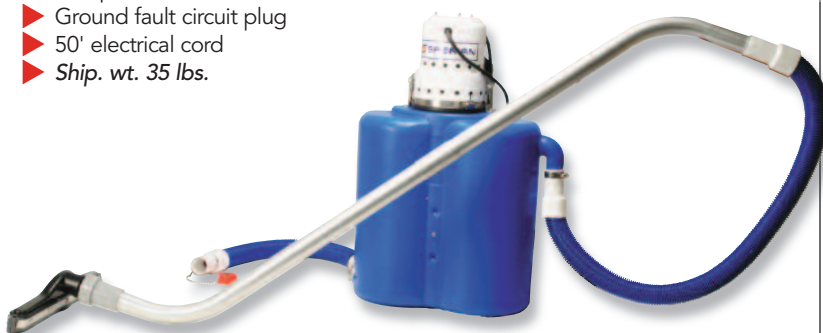

BH141 Salvage-Master Wet Vacuum

BH142 Optional Carpet Adapter

- ▶ Shoulder On/Off switch
- ▶ 5.9 gallon tank capacity
- ▶ Drain hose
- ▶ Two piece wand
- ▶ Ground fault circuit plug
- ▶ 50' electrical cord
- ▶ Ship. wt. 35 lbs.

# Salvage Covers and Runners



## Canvas Covers:

Treated with a fire and water resistant finish. Meets requirements for California State Fire Marshall, NFPA-701 (large scale), and CPAI Section 6. Water-resistant finish and mildew inhibitors added.

## Vinyl Covers:

Excellent wear and tear resistance, waterproof. Meets California State Fire Marshall requirements, UL-214 Classified, ASTM-E-84, Class A Flame standard. Easily wipes clean.



## Salvage Covers

Cat#	Material	Size	Ship. wt.
J860	Canvas	12'x14'	15 lbs.
J861	Canvas	12'x18'	19 lbs.
J862	Canvas	14'x18'	22 lbs.
J857	Vinyl	12'x14'	20 lbs.
J858	Vinyl	12'x18'	26 lbs.
J859	Vinyl	14'x18'	30 lbs.

## Runners

Cat#	Material	Size	Ship. wt.
AR103	Canvas	24"x20'	6 lbs.
AR104	Canvas	30"x20'	6 lbs.
AR101	Vinyl	24"x20'	6 lbs.
AR102	Vinyl	30"x20'	6 lbs.

# Passfire™ Burn Pan Training Unit

The Halcyon Product's Passfire™ Burn Pan Training Unit is a cost-effective, portable solution for contained, controlled burns for training purposes. It is used by fire departments and training firms for fire extinguisher training.

- ▶ Conduct safe, inexpensive fire extinguisher training
- ▶ Firefighter designed and approved
- ▶ Helps businesses and organizations comply with OSHA 1910.157
- ▶ Uses clean burning propane and is environmentally-friendly
- ▶ Fire is contained within the deep, durable stainless steel pan and does not affect the surrounding training areas, eliminating mess and damage
- ▶ Sturdy supports for set up on any flat surface
- ▶ Contains quick disconnects for easy set up and tear down and provides additional security, controlling the supply of propane to the copper burn element
- ▶ Drain in bottom of pan for easy clean up and water disposal
- ▶ 25' propane hose
- ▶ Dimensions: 25"Lx25"Wx16"H
- ▶ Ship. wt. 57 lbs.



Propane not included



BK069 Passfire™ Burn Pan Training Unit