

RECHARGEABLE


INTRANT™ DUAL-LIGHT™ ANGLE LIGHT

# NIGHTSTICK®

Life Depends on Light™

**EXCLUSIVE**  
45°  
DOWNWARD FLOODLIGHT

HEAD ROTATES 90°



Head rotates 90° - directing beam exactly where it's needed most



45° downward floodlight lights an 8 foot walking area



Easy-to-use with gloves, the large switches independently control separate LEDs




Heavy-duty, clip and V-ring securely holds tight to gear in any situation

GRAB-N-GO CHARGING BASE



FLY STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	110 LUMENS	60 LUMENS
	7h	15h	27h
	420m	250m	187m
	41000cd	15625cd	8750cd



AVAILABLE IN MULTIPLE COLORS.



**200 LUMENS**

1-800-233-2155 · 1-469-326-9400 · nightstick.com

**INTRANT™****DUAL-LIGHT™ ANGLE LIGHT****RECHARGEABLE****ITEM NUMBER/UPC**

XPR-5568RX (Red), 0 17398 80631 2  
 XPR-5568GX (Green), 0 17398 80630 5

**MARKET APPLICATIONS**

Hazardous work environments, fire, rescue, industrial and automotive

**CERTIFICATIONS**

- CE, cULus, Atex, IECEx, NFPA

**CASE MATERIAL**

- Glass filled nylon polymer

**LUMENS/RUNTIME****FLASHLIGHT**

- HIGH: 200L, 7 hrs. runtime
- MEDIUM: 110L, 15 hrs. runtime
- LOW: 60L, 27 hrs. runtime
- STROBE

**FLOODLIGHT**

- HIGH: 100L, 7 hrs. runtime
- MEDIUM: 40L, 15 hrs. runtime
- SURVIVAL: 20L, 27 hrs. runtime

**DUAL-LIGHT**

- 205L, 7 hrs. runtime

**CANDELA****FLASHLIGHT**

- HIGH: 38,000
- MEDIUM: 15,625
- LOW: 8,750

**BEAM DISTANCE****FLASHLIGHT**

- HIGH: 420m
- MEDIUM: 250m
- LOW: 187m

**WATER RATING**

- IP-67 (dustproof and waterproof)

**DROP RATING**

- 2 meters

**DIMENSIONS**

- LENGTH: 6.6 in (168mm)
- WIDTH: 2.6 in (66mm)
- DEPTH: 2.6 in (66mm)
- BEZEL DIAMETER: 2.1 in (53mm)
- WEIGHT: 10.6 oz (301g)(with batteries)

**BATTERY**







- Rechargeable Li-ion battery pack
- AA Battery carrier (batteries not included)


**WARRANTY**

- Limited Lifetime Warranty

**WHAT'S INCLUDED**

- Angle light
- Rechargeable Li-ion battery pack
- AA Battery Carrier
- Snap-in Rapid Charger
- AC & DC Power Supplies
- Instruction Manual

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>200</b> LUMENS	<b>110</b> LUMENS	<b>60</b> LUMENS
	<b>7h</b>	<b>15h</b>	<b>27h</b>
	<b>420m</b>	<b>250m</b>	<b>187m</b>
	<b>41000cd</b>	<b>15625cd</b>	<b>8750cd</b>
	<b>2m</b>		
	<b>1m</b>		

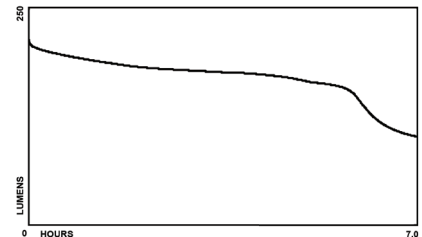**XPR-5568 PERFORMANCE CURVE**

**Bayco Products, Inc. XPR-5568**  
 640 S. Sanden Blvd., Wylie, TX 75098



Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS  
 For use with Bayco Li-ion Battery Pack 5568-BATT or  
 5566-CARRIER with 3 AA Energizer Type EN91 or E91  
 batteries only

**LISTED**  
 E 114304  
 ID 4003544

ELECTRICAL SAFETY  
 INTRINSICALLY SAFE  
 SECURITE INTRINSEQUE

CE 0359

Control Drawing: 5568-CERT-DWG-1-03

CLASS I DIV 1 GRPS A-D T3  
 CLASS II & III DIV1 GRPS E-G T135°C  
 CLASS I ZONE 0 AEx ia IIC T3 Ga

Ⓢ I M1 Ex ia op is I Ma  
 Ⓢ II 1 G Ex ia op is IIC T3 Ga

Ex ia op is I Ma  
 Ex ia op is IIC T3 Ga  
 DEMKO 17 ATEX 1927  
 IECEx UL 17.0082

-20°C ≤ Tamb ≤ +40°C  
 1.5V/Cell Alkaline  
 3.7V/Cell Li-ion

IP-67

Um: 10V



AVAILABLE IN MULTIPLE COLORS.