

PRODUCT DATA SHEET



P/N: **1003-HD TOOLOK-HD**



The <u>Toolok HD</u> is a new and improved cost effective bracket featuring a positive locking design. A versatile and easy to use product providing secure mounting for a wide variety of tools and equipment.

FEATURES

- The Griplok strap operates easily and will adjust for various size equipment.
- Rugged injection molded and thermoformed components made from high quality materials
- · Weather, UV resistant
- Non-conductive
- · Can be mounted horizontally or vertically.
- Mounts to PAC tool boards and other flat surfaces. Stainless Steel Hardware included.
- Strap available in Yellow, Black and Orange
- · Certified for in-cab use per NFPA Standards.

EQUIPMENT

Various


Rounds: 1/8"(3.1)- 1-1/2"(38.1) Diameter

Rectangular: Up to 1-1/2"(38.1)W x 1-1/2"(38.1) T


TYPICAL SPECIFICATION

Mounting bracket shall be PAC PN 1003-HD Bracket shall be made from tough, corrosion free material. Hardware shall be stainless steel.

Users shall be protected from conductivity.

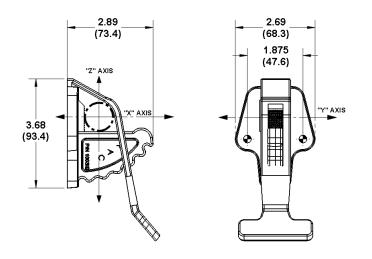





Specifications

P/N	WT.	MAX. DYNAMIC LOAD	MAX. STATIC LOADS	GRIP RANGE	TEMP RANGE	FLAME RESISTANCE	PAINTABLE
1003HD	.2lbs .09kg	8LBS(3.6kg) @ 10G'S	"X" axis — "Y" axis — "Z" axis -	VARIABLE	-20 to 52 °C -4 to 125 °F	GOOD	YES BODY ONLY

Performance Advantage Company Lancaster				Lancaste	r, New York	www.pactoolmounts.com	888-514-0083
I	REFERENCE	QTY	REMARKS		PROJECT		
					LOCATION		
					BUYER		
					DEALER		
					BUILDER		
l					SUBMITTED E	BY:	DATE:







The cost effective Toolok-HD Bracket is a versatile and easy to use product, providing secure mounting for a wide variety of tools and equipment.

- · Wider mounting base for increased stability
- · Strength enhanced base material for more durability
- Thicker walled locking strap for more strength
- · Molded from high quality materials
- High performance elastomer GRIPLOK is rated to 5400psi
- · Weather, UV resistant
- Non-conductive
- · Can be mounted horizontally or vertically



