
# **FOAMATE**<sup>TM</sup> FOAMATE Model ATP 2.1 CLASS B Foam Proportioner



# **Redesigned for Improved Panel Mounting** Available in GPM or LPM Models



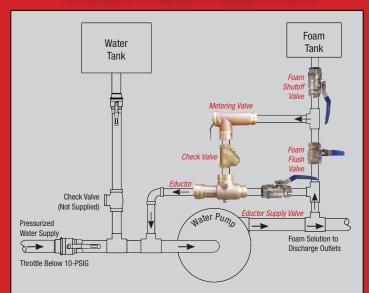

### **Performance Range** At 125-250 PSI [8.5-17 Bar]

# **FOAMATE<sup>™</sup> 2.1 Product Features**

- For Industrial or Municipal Pumpers
- Integrated Flow GPM/LPM Dial with 1%, 3% & 6% Scale
- Metering Valve is Panel Mountable
- All Brass Construction
- Factory Calibrated
- Certified to NFPA Standards

### **FOAMATE™ 2.1 Details**

- Eductor Water Connection is 1.5" Victaulic
- Eductor Foam Solution Connection is 2" Victaulic
- Eductor Foam Concentrate Connection is 2" Victaulic
- Driving Water Flow is 85-GPM at 125-PSI
- Check Valve Connections are 2" FNPT
- **Ball Valve Connections are 2" FNPT**
- Metering Valve Connections are 2" Victaulic or 2" FNPT Refer to the list below to make your foam system selection.

FOAMATE 2.1 ATP Part Numbers			
Part #	2" Metering Valve	Dial Plate	Valves
31.014.2	Victaulic Ends	GPM	No
31.014.3	Victaulic Ends	[LPM]	No
31.014.4	Victaulic Ends	GPM	Yes
31.014.5	Victaulic Ends	[LPM]	Yes
31.014.12	FNPT Ends	GPM	No
31.014.13	FNPT Ends	[LPM]	No
31.014.14	FNPT Ends	GPM	Yes
31.014.15	FNPT Ends	[LPM]	Yes



Three (3) Ball Valves Provided with Kits that Include Valves

2000-GPM [8000-LPM] at 1% 2000-GPM [8000-LPM] at 3% 1000-GPM [4000-LPM] at 6%



World Class **Fire Apparatus** Plumbing and Hardware Products FOAMATE<sup>™</sup> is a trademark of Trident Emergency Products, LLC

# Trident Emergency Products, LLC

2940 Turnpike Drive | Suite #9 | Hatboro, Pennsylvania 19040 USA 215-293-0700 Phone 215-293-0701 Fax sales@tridentdirect.com Email

TridentDirect.com