



# **CIRCUL-AIR PPE-EXPRESS DRYING CABINET – 2 GEAR**



- Meets NFPA 1851 Requirements
- Commercial Grade
- 850 CFM / 1500 W Heating
- Capacity of 4 pieces of gear
- 120V Plug included
- 10 Year Warranty (Contact Circul-Air for details)

#### **Includes:**

- 4 Gear Hangers, 4 Glove Hangers
- 3 Wire Racks, 1 Boot Rack

#### **Dimensions:**

2 GEAR 33" W x 37" D x 84" H



Part # V511

**NFPA 1851 MADE EASY**

[www.circul-air-corp.com](http://www.circul-air-corp.com)



1 (800) 795 1150

[orders@circul-air-corp.com](mailto:orders@circul-air-corp.com)

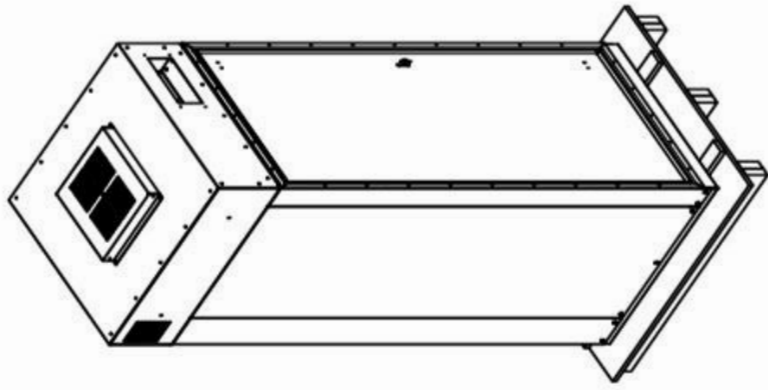

**NOTES:**

- 1) UNIT SHIPPED ENCLOSED IN PALLET
- 2) ADJUSTABLE FEET CAN BE REMOVED FOR MOVEMENT
- 3) ADJUSTMENT OF FEET 1/2" - 1"
- 4) DRYER HEAD CAN BE REMOVED ON REQUEST
- 5) 120V, 20A PLUG

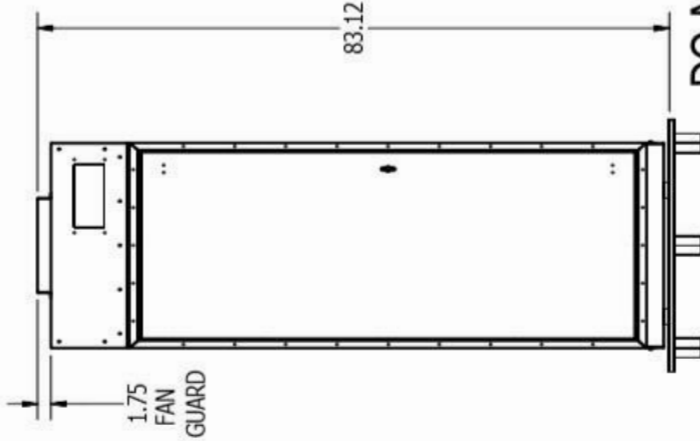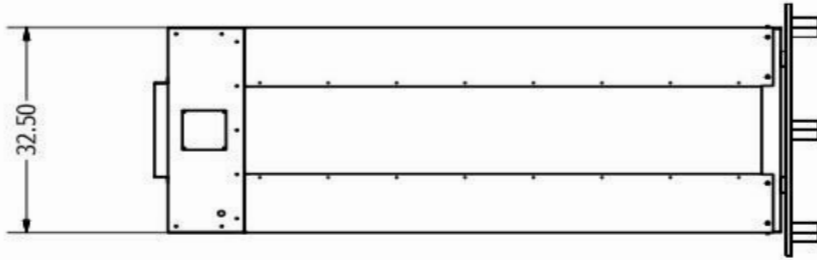

DO NOT SCALE DRAWING

35.18  
ADD 2" FOR HANDLES

INTELLECTUAL PROPERTY OF CIRCUL-AIR CORP.

THIS DOCUMENT IS THE PROPERTY OF CIRCUL-AIR CORP. ANY REPRODUCTION IN WHOLE OR PART WITHOUT WRITTEN PERMISSION FROM CIRCUL-AIR CORP IS PROHIBITED.

DRAWN	2020-02-19	CIRCUL-AIR CORP.	
Fenwick ODM			
CHECKED			
QA	2020-01-01	TITLE	
MFG		DUAL PURPOSE DRYER - 2 GEAR (2019)	
CIRCUL-AIR	2020-01-01		
APPROVED			
CIRCUL-AIR	2020-01-01		
		SIZE	REV
		B	0
		45703002 - COMPLETE	
		SHEET 1 OF 1	

**UNLESS OTHERWISE SPECIFIED:**

DIMENSIONS ARE IN INCHES

TOLERANCES:

FRACTIONAL:  $\pm \frac{1}{16}$ "

ANGULAR:  $\pm 0.5$  DEG.

TWO PLACE DECIMAL:  $\pm .01$ "

THREE PLACE DECIMAL:  $\pm .001$ "

INTERPRET GEOMETRIC

TOLERANCES PER: ANSI